
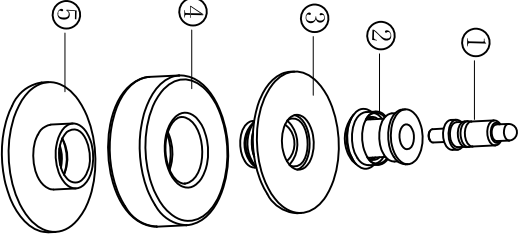


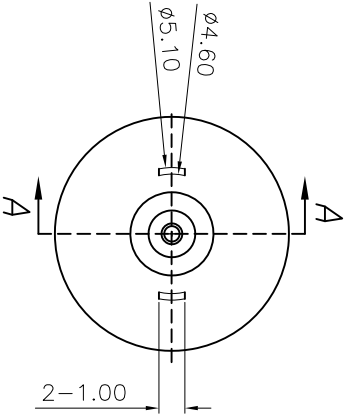
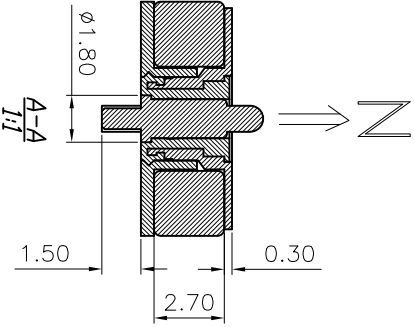


RoHS2.0,








REV	ECN NO.	DETAILS	BY	DATE
1				
2				
3				

NOTES:
1.0 Rated voltage(Per Contact):12 Volts
2.0 Rated Current(Per Contact):2A maximum
3.0 Working Temperature Range: -30~85
4.0 1um≈40u"

5	--	电极环	1pcs	C3604	镀镍80-120u"	Ø9.0*1Ø4.0
4	--	磁铁	1pcs	NE2	镀镍200u"以上	*H1.2,7
3	--	前壳	1pcs	SUS316F	镀镍80-120u"	Ø8.5*3.25
2	--	胶料	5g	黑色 PA9T		黑色
1	--	POGO Pin	1pcs	C3604	镀金3u	Ø1.8*6.2
序号		料号	数量	材质	表面处理	备注

"UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: X.±0.20 .X±0.15 .XX±0.10 X°.±2° .X°±0.5°" Pomagtor Website:www.pomagtor.net				POMAGTOR POGO PIN - 16 YEARS OF PROFESSIONAL Magnetic connection- professional for customization		
TITLE	Magnetic connector	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
SPEC	2PIN-DL-9MM/M	SCALE	1			
PART NO	RD91.HHJ0210811-001	UNIT	mm	ShenYou .WU	HongJun .Hu	dingSong .Ge
VIEW ANGLE		DATE	21/09/02			
		SHEET	1 of 1			

RoHS2.0.

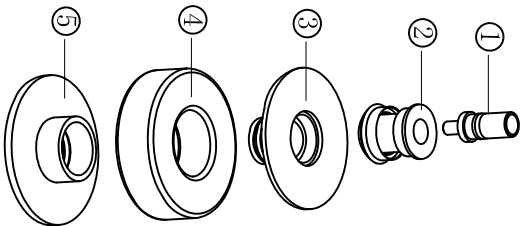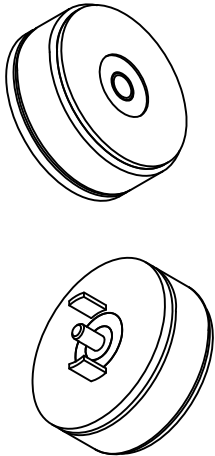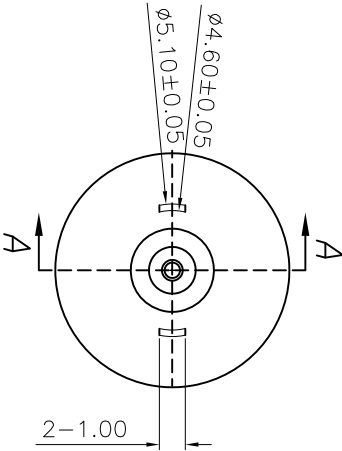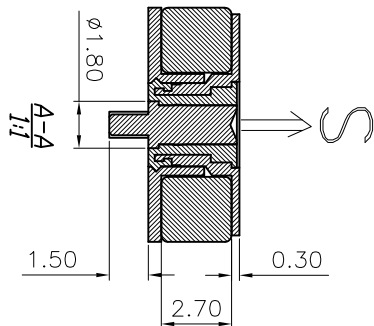

REV	ECN NO.	DETAILS	BY	DATE
1				
2				
3				

NOTES:
1.0 Rated voltage(Per Contact):12 Volts
2.0 Rated Current(Per Contact):2A maximum
3.0 Working Temperature Range: -30~85
4.0 1um≈40u"

5	--	电极环	1pcs	C3604	镀镍80-120u"	Ø9.0*3.6
4	--	磁铁	1pcs	NE2	镀镍200u"以上	Ø9.0*11.4.0 *H:2.7
3	--	前壳	1pcs	SUS316F	镀镍80-120u"	Ø8.5*3.25
2	HY75.00628-007	胶料	5g	黑色 PA9T		黑色
1	--	PIN	1pcs	C3604	镀金3u	Ø1.8*4.9
序号	料号	名称	数量	材质	表面处理	备注

"UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES LINEAR TOLERANCE: X:±0.20 .X:±0.15 .XX:±0.10 X*:±2° .X*:±0.5°" Pomagtor Website:www.pomagtor.net				POMAGTOR POGO PIN - 16 YEARS OF PROFESSIONAL Magnetic connection- professional for customization		
TITLE	Magnetic connector	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
SPEC	2PIN-DL-9MM/F	SCALE	1			
PART NO	RD91.HHJ0210811-001	UNIT	mm			
VEIW ANGLE		DATE	21/08/11	ShenYou .WU	HongJun .Hu	dingSong .Ge
		SHEET	1 of 1			