




REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	Qiaoyun	2017.11.1
2				
3				

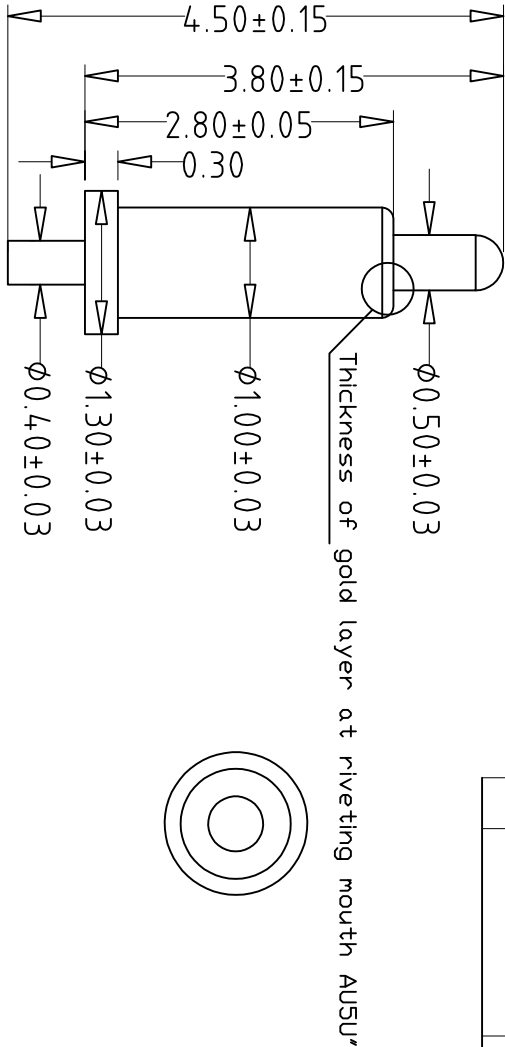

NOTES:
1.0 PLATING:
1)Contact plating:brass Au5u"over 50-80u " Ni
2)Contact solder area plating: brassAu 7u"over 50-80u" Ni
3)Spring: SUS AU1-3U
2.0 Rated voltage(Per Contact): 5 Volts
3.0 Rated Current(Per Contact): 1A maximum
4.0 Recommended Working Stroke&force:
1)Stroke 0.7 mm(Per Contact): 60gf±20gf

5.0 Mechanical life:
1)Mechanical lif: 10,000 Cycles Min
6.0 Working Temperature Range: -30~85°

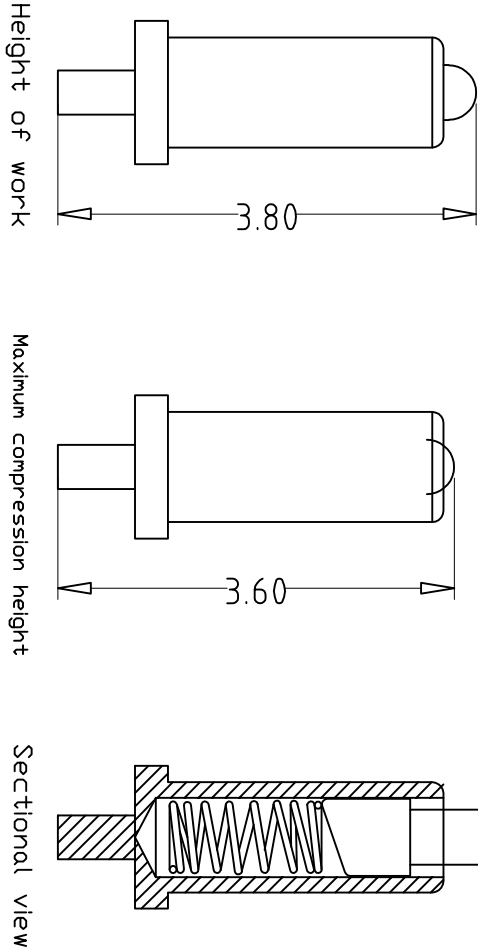

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X±0.20 ,X±0.15 ,XX±0.10
X*±2° ,X*±0.5°*
Pomogtor
Website:www.pomogtor.net

POMOGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

Item	1	2	3	4
Height of work	-	-	-	-
Maximum compression height	-	-	-	-
Sectional view	-	-	-	-
Q TY	-	-	-	-
Remark	-	-	-	-

ITEM	RD.S/N.	VEIW ANGLE	REV	SCALE	UNIT	DATE	SHEET
POGOPIN	HY90-00858-002		A4	1	mm	2017/11/1	1 of 1