REV	ECN NO.	DETAILS	BY	DATE
1	A□	The new version was released	-	-
2				
3				

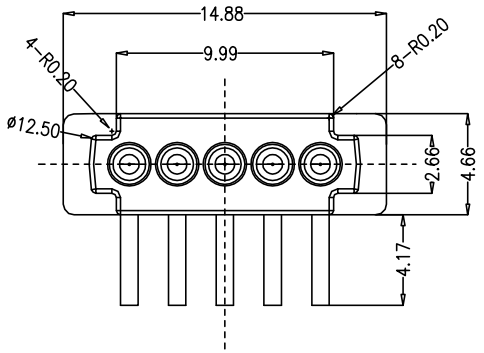



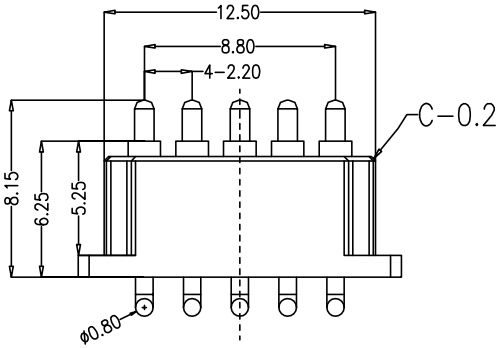



模具编号:HZ-00050

① maximum compression
② Work height

NOTES:
1.0 Rated voltage: 12 Volts
2.0 Rated Current: 8A maximum
3.0 Contact Resistance: 30mΩ maximum
4.0 Recommended Working Stroke&Force:
1)Stroke1.5mm 60±20gf
5.0 Mechanical life:
1)Mechanical life:10000 Cycles Min
6.0 Salt Spray:48H Min
7.0 Working Temperature Range: -30~85°C
8.0 Marked with "*" as key dimension
9.0 The product must conform to the latest RoHS

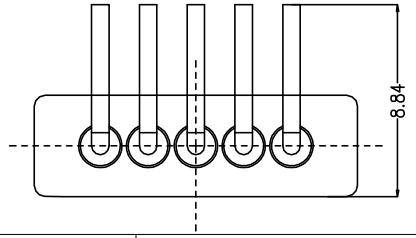

Item	Part Name	Material		Q'TY	Remarks
4					
3					
2	housing	LCP	Black	1pcs	
1	Pogo Pin	HBi59-1.5	Ni1.5um-Ni3um+Au0.125um	5pcs	-

"UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X.±0.20 .X±0.15 .XX±0.10
X°.±2° .X°±0.5°"
Pomagtor
Website:www.pomagtor.net

POMAGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connector -professional for customization

ED

ITEM	2.0.*15.6	REV	A4	DRAWN BY	CHECKED BY	APPROV BY
S/N.	HY91.100448-001	SCALE	1	/		
RD.S/N.	/	UNIT	mm			
VEIW ANGLE		DATE	-			
		SHEET	1 of 1			