
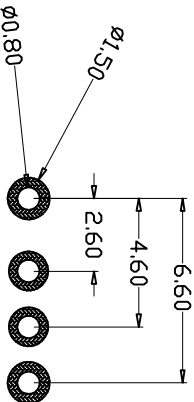



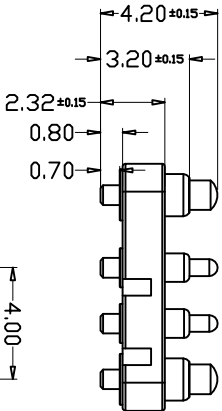



REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	-	-
2				
3				



PCB LAYOUT

Layout Tolerance:±0.05mm

- NOTES:
- 1.0 Rated voltage: 12 Volts
 - 2.0 Rated Current: 1.2A maximum
 - 3.0 Contact Resistance: 60ma maximum
 - 4.0 Recommended Working Stroke&Force:
 - 1)Stroke0.5mm 150±5gf
 - 5.0 Mechanical life:
 - 1)Mechanical life:10000 Cycles Min
 - 6.0 Salt Spray:48H Min
 - 7.0 Working Temperature Range: -30~85°C
 - 8.0 Marked with “*” as key dimension
 - 9.0 The product must conform to the latest RoHS

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X:±0.20 ,X±0.15 ,XX±0.10
X*:±2° ,X*:±0.5°
Pomagtor
Website:www.pomagtor.net

POMAGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

4			
3			
2	housing	PA9T	Black
1	Pogo Pin	HBIS9-1.5	Nil 5um-NI3um+Au0.25um
Item	Part Name	Material	Q'TY

ITEM	REV	A4	DRAWN	CHECKED	APPROV
S/N.	HY91-00166-002	SCALE	1	BY	BY
RD.S/N.	/	UNIT	mm	-	
VEIW		DATE	-		
ANGLE		SHEET	1 of 1		