

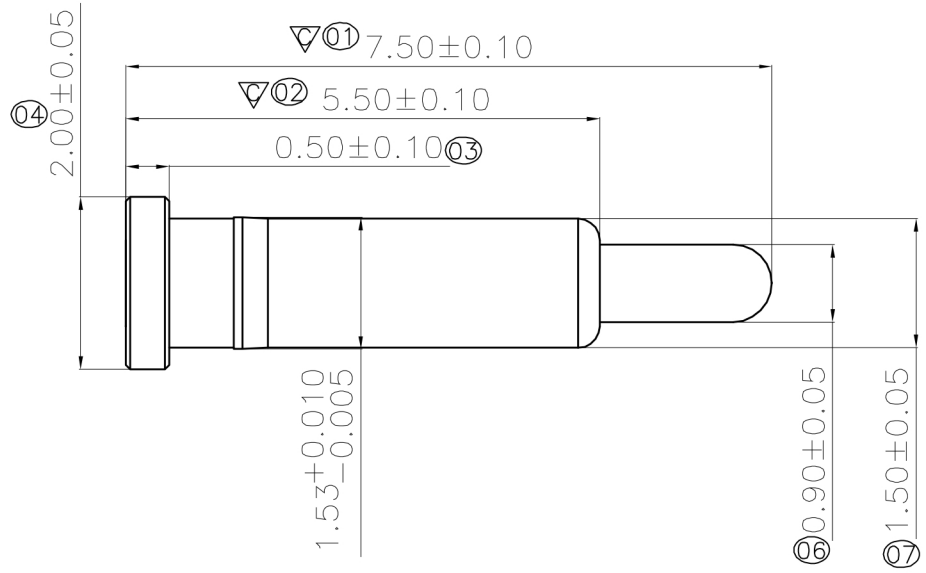


变更针头与针管结构



NOTE:
 1.Material
 .Plunger: Brass
 2.Plating
 .Contact surface:1u" minimum Au over 80~100u" Ni
 3.Electrical
 .Rated Current & Voltage: DC 12V; AC 1~1.65A,24H
 .Contact Resistance: 25mΩ maximum
 4.RoHS COMPLIED PRODUCT.
 5.Elasticity:Stroke 0mm:10gfStroke 0.25mm:50gf Stroke 1.60mm
 (or fully compressed):100~150gf
 6.Life (Million):stroke range Max0.5~4mm
 Stroke 10000 times
 7.Temperature: -40°~150°
 8.Use: Electronic photography: power, mobile phone, antenna, ground, battery contact.

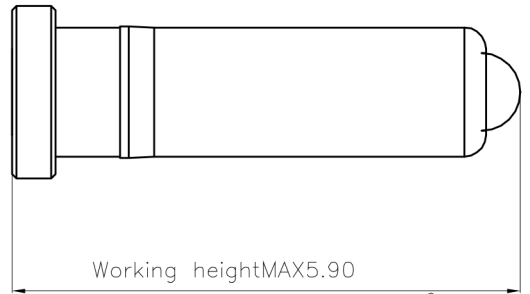

PCB LAYOUT
 Layout Tolerance:±0.20mm

Spring Probe

深圳市泰科汉泽精密电子有限公司
Tyco Hanconn Precision Electronics

DRAW NO.	DATE	MATERIAL:Brass C3604	DRAW NAME:	
DESIGN:	譚立強	2012.02.13	SEE TABLE	
CHECK:			FILE:	
REVIEW:			P/N:SEE TABLE	
			UNIT:	SHEET:
			mm	1/1

DIM	TOL	DIM	TOL
X.		X"	3'
X.X	±0.20	X.X"	
X.XX	±0.15	X.XX"	
X.XXX	±0.10	X.XXX"	