
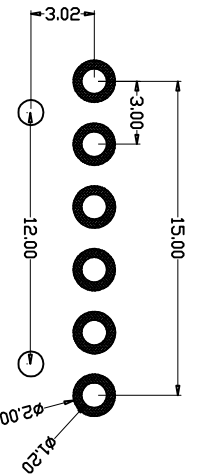
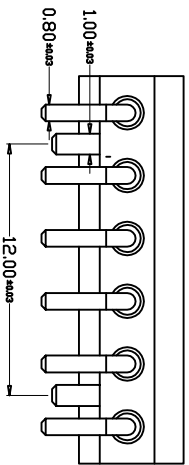


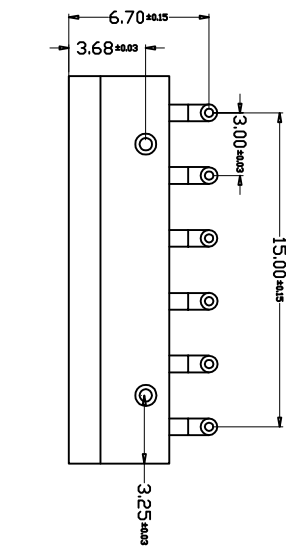


REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	-	-
2				
3				

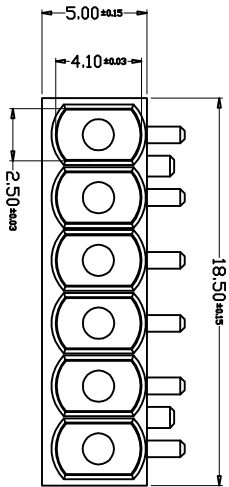

PCB LAYOUT  
Layout Tolerance: ±0.05mm

- NOTES:
- 1.0 Rated voltage: 12 Volts
  - 2.0 Rated Current: 15A maximum
  - 3.0 Contact Resistance: 60mΩ maximum
  - 4.0 Recommended Working Stroke&Force:  
1)Stroke:1.0mm 150±5gf
  - 5.0 Mechanical life:  
1)Mechanical life:10000 Cycles Min  
6.0 Salt Spray:48H Min  
7.0 Working Temperature Range: -30~85°C  
8.0 Marked with "\*" as key dimension  
9.0 The product must conform to the latest RoHS

\*UNLESS OTHERWISE STATED  
ALL DIMENSIONS ARE IN  
MILLIMETRES  
LINEAR TOLERANCE:  
X:±0.20 X:±0.15 .XX:±0.10  
X':±2° X'±0.5°  
Pomagtor  
Website:www.pomagtor.net

**POMAGTOR**  
16 YEARS OF PROFESSIONAL  
Magnetic connector - professional for customization

Item	Part Name	Material	Q'TY	Remarks
1	Pogo Pin	HBIS9-15	6pcs	-
2	housing	LCP	1pcs	
3		Black		
4				

ITEM	REV	A4	SCALE	UNIT	DATE	SHEET
			1	mm		1 of 1

DRAWN BY  
CHECKED BY  
APPROV BY

ED