

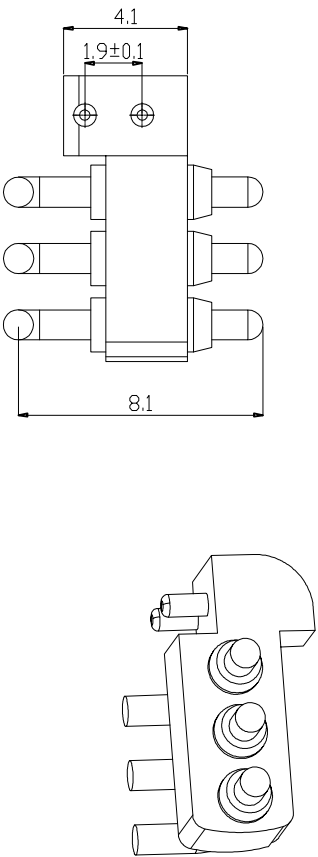


REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	-	2016.10.22
2				
3				

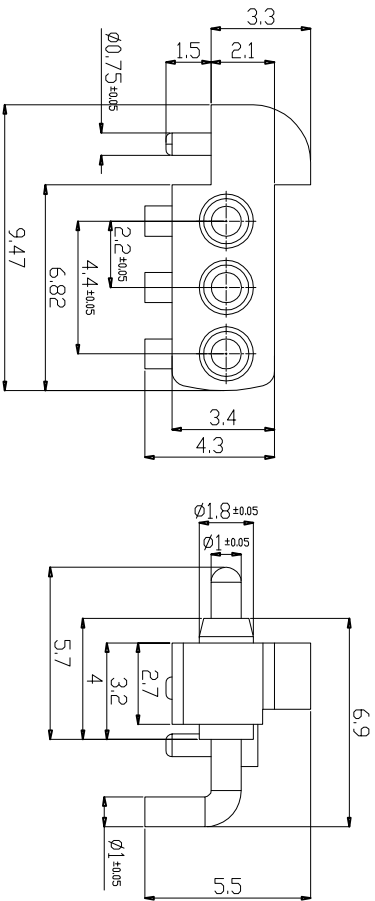

- NOTES:
- 1.0 Rated voltage: 12 Volts
 - 2.0 Rated Current: 8A maximum
 - 3.0 Contact Resistance: 30ma maximum
 - 4.0 Recommended Working Stroke&Force: 1)Stroke1.0mm 150 \pm 5gf
 - 5.0 Mechanical life: 1)Mechanical life:10000 Cycles Min
 - 6.0 Salt Spray:48H Min
 - 7.0 Working Temperature Range: -30~85°C
 - 8.0 Marked with “*” as key dimension
 - 9.0 The product must conform to the latest RoHS



“UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X:±0.20 .X:±0.15 .XX:±0.10
X*:±2° .X*:±0.5°”
Pomagtor
Website:www.pomagtor.net

POMAGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

ITEM	REV	A4	DRAWN	CHECKED	APPROV
4			BY	BY	BY
3					
2	housing	PA9T	1pcs		
1	Pogo Pin	HBIS9-1.5	3pcs	-	
Item	Part Name	Material	Q'TY	Remarks	