



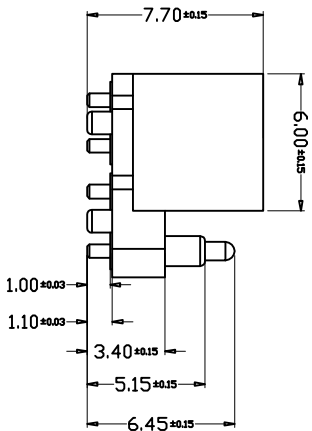




REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	-	-
2				
3				



PCB LAYOUT
Layout Tolerance: ±0.05mm

- NOTES:
- 1.0 Rated voltage: 12 Volts
 - 2.0 Rated Current: 1.5A maximum
 - 3.0 Contact Resistance: 60ma maximum
 - 4.0 Recommended Working Stroke&Force:
1)Stroke0.95mm 150±5gf
 - 5.0 Mechanical life:
1)Mechanical life:10000 Cycles Min
6.0 Salt Spray:48H Min
7.0 Working Temperature Range: -30~85°C
8.0 Marked with "*" as key dimension
9.0 The product must conform to the latest RoHS

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETERS
LINEAR TOLERANCE:
X:±0.20 X:±0.15 XX:±0.10
X*:±2° X*:±0.5°
Pomagtor
Website:www.pomagtor.net

POMAGTOR
16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

Item	Part Name	Material	Q'TY	Remarks
1	Pogo Pin	HBIS9-15	4pcs	-
2	housing	PA9T	1pcs	
3		Black		
4				

ITEM	REV	A4	SCALE	UNIT	DATE	SHEET	1 of 1
S/NL	HY91-00166-003		1	mm			
RD.S/NL	/						
VEIW ANGLE							

DRAWN BY
CHECKED BY
APPROV BY

ED