
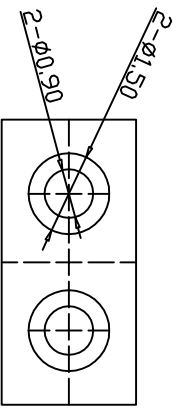

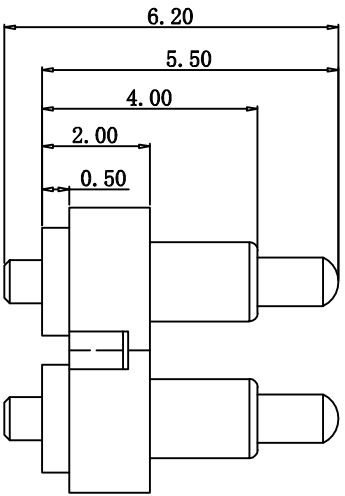


REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	-	-
2				
3				

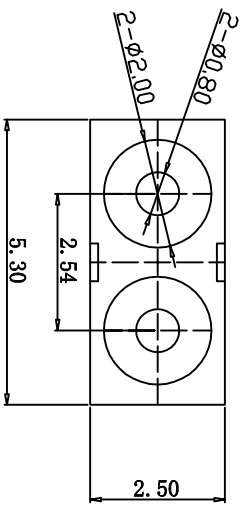

1-maximum compression
2-work height

- NOTES:
- 1.0 Rated voltage: 36 Volts
 - 2.0 Rated Current: 1A maximum
 - 3.0 Contact Resistance: 60ma maximum
 - 4.0 Recommended Working Stroke&Force:
1)Stroke1.0mm 35±20gf
 - 5.0 Mechanical life:30000 Cycles Min
 - 6.0 Salt Spray:48H Min
 - 7.0 Working Temperature Range: -30~85°C
 - 8.0 Marked with "*" as key dimension
 - 9.0 The product must conform to the latest RoHS

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X:±0.20 X:±0.15 .XX:±0.10
X*:±2° X*:±0.5°
Pomagtor
Website:www.pomagtor.net

POMAGTOR
16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

Item	Part Name	Material	Q'TY	Remarks
3	housing	PA9T	1pcs	
2	Pogo Pin	HBIS9-1.5	2pcs	

ITEM	REV	SCALE	REV	A4	DRAWN	CHECKED	APPROV
S/NL	HY91.00554-001	1			BY	BY	BY
RD.S/NL	/	mm					
VEIW ANGLE		DATE					
		SHEET	1 of 1				