

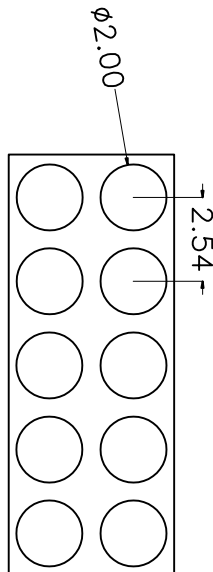

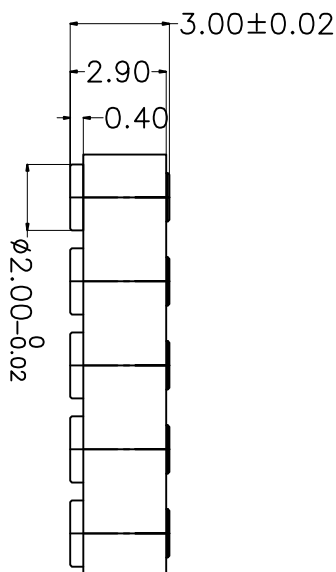


REV	ECN NO.	DETAILS	BY	DATE
1	AD	The new version was released	Qiaoyun	2014.11.25
2				
3				

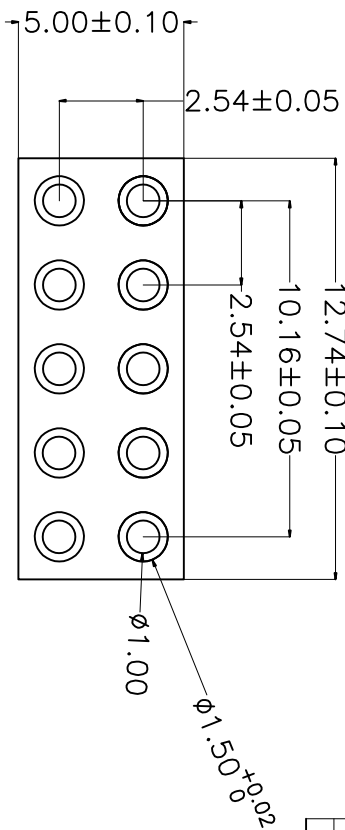

- NOTES:
1.0 PLATING:
1) Power Pin: brass Au5u"over 50-80u" Ni
4) Housing: LCP 265°MAX
2.0 Rated voltage(Per Contact): 12 Volts
3.0 Rated Current(Per Contact): 5A maximum
4.0 Insulation Resistance: 100MEGAOHMS Minimum
5.0 Dielectric Withstanding Voltage: 100VRMS AT 60HZ
6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
7.0 Recommended Working Stroke&Force:
8.0 Working Temperature Range: -30~85°

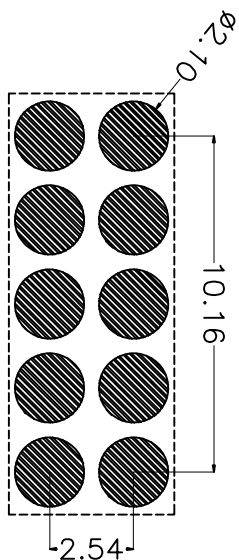

PCB LAYOUT
Layout Tolerance: ±0.05mm

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X±0.20, X±0.15, XX±0.10
X*±2°, X*±0.5°
Pomagtor
Website: www.pomagtor.net

POMAGTOR
POGO PIN - 16 YEARS OF PROFESSIONAL
Magnetic connector - professional for customization

4	-	-	-	-	-
3	-	-	-	-	-
2	-	-	-	-	-
1	-	-	-	-	-
Item	-	-	Finish	Q TY	Remark

ITEM	10PIN pogo pin connector	REV	A4	DRAWN BY	CHECKED BY	APPROV BY
S/N	-	SCALE	1			
R.D.S/N	HY91-00154-002	UNIT	mm	Qiaoyun		
VEIW ANGLE		DATE	2014/11/25			
		SHEET	1 of 1			