RoHS Executive

REV	ECN NO.	DETAILS	BY	DATE
A0		新版发行	周明检	22/07/21
A1		-	-	-
A2		-	-	-



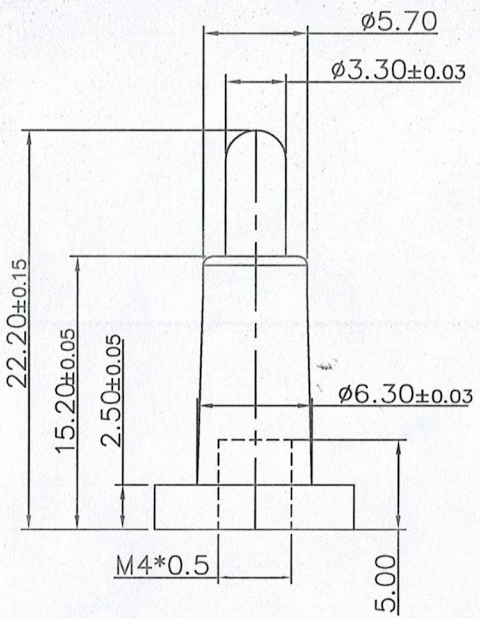

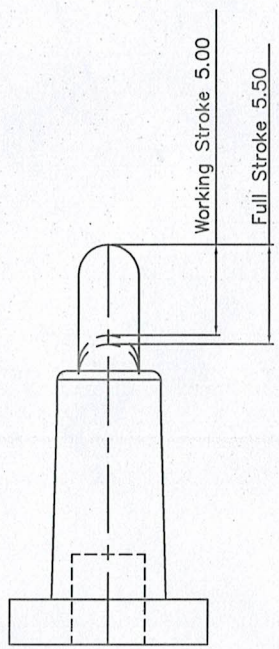

NOTES:
1.0 Contact Resistance:
2.0 Recommended Working Stroke&Force:
1)Stroke 5.0mm 400±80gf
3.0 Mechanical life:
1)Mechanical life:50,000 Cycles Min
4.0 Salt spray test 48 hours
5.0 Working Temperature Range: -30~85°C

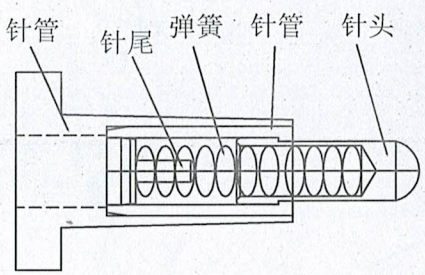

序号	物料编码	品名	规格描述	用量
5	HY53S.2600351290-01	弹簧	0.35*2.6*12.9*18N SUS304 下压至7.46mm 弹力400±80gf 弹簧外径±0.03 线径±0.003 长度±0.05 寿命3W 次以上	1pcs
4	HY701.0037048000-01	针尾	3.74*4.8 针尾 C3604 Ni50-120u"	1pcs
3	HY721.0050102000-01	针管	5.02*10.2针管 孔(3.72*9.40)孔 (3.34*0.8) C3604 Ni50-120u	1pcs
2	HY520.5109152000-02	针管	10.97*15.2针管 孔5.0*10.2 材质：不锈钢S303F 内牙 M4*0.5 无电镀	1pcs
1	HY711.0037101000-01	针头	3.7(3.3*6.9)*10.10空心针头 C3604 Ni50-120u"	1pcs

"UNLESS OTHERWISE STATED ALL DIMENSIONS ARE IN MILLIMETRES
LINEAR TOLERANCE:
X.±0.20 .X±0.15 .XX±0.10
X°.±2° .X°±0.5°"
Pomagtor
Website:www.pomagtor.net

POMAGTOR
PROFESSIONAL CUSTOMIZATION SINCE 2007
HIGH FREQUENCY POGO PIN .MAGNETIC CONNECTOR

TITLE	POGOPIN	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
SPEC	9.5*22.2	SCALE	1	周明检		
PART NO	HY921.0095222000-01	UNIT	mm			
VEIW ANGLE		DATE	22/07/21			
		SHEET	1 of 1			