




变更记录



版本	变更描述	日期	设计者
A0	新版发行	2019.05.18	

A

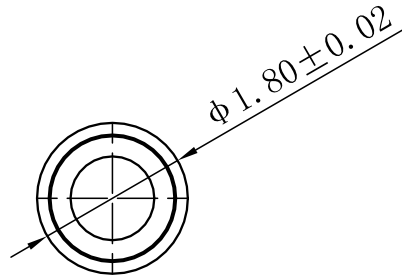

B

C

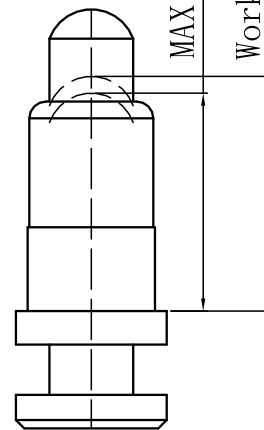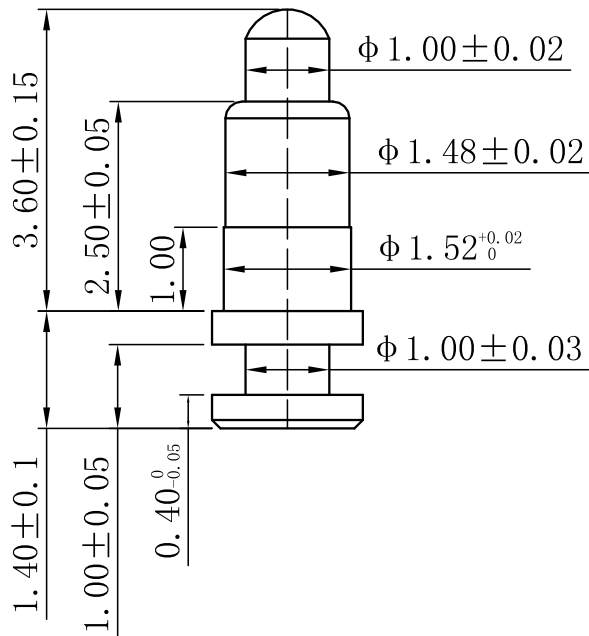

D

NOTES:

1.0 PLATING:

- 1) Contact plating: brass Au40u" over 50-100u" Ni
- 2) Contact solder area plating: brass Au10u" over 50-100u" Ni
- 3) Spring: SUS304

2.0 Rated voltage (Per Contact): 60 Volts

3.0 Rated Current (Per Contact): 1A maximum

4.0 Contact Resistance: 30mΩ maximum before fest

5.0 Recommended Working Stroke & Force:

- 1) Stroke 0.8mm (Per Contact): 110 ± 20gf

6.0 Mechanical life:

- 1) Mechanical life: 10,000 Cycles Min

7.0 Working Temperature Range: -30~85° C

POMAGTOR
磁性连接—专业为您定制

深圳市泰科汉泽精密电子有限公司
Pomagtor Precision Electronics

3	***	***	1PCS	品名描述	1.8*5.0弹针 材质C3604 针头镀金40u" 针管镀金10u" 工作行程0.8mm 弹力110gf 过盐雾48H	版本	A0
2	***	***	1PCS	料号	HY90.01149-001	图档编号	
1	***	***	1PCS	料号		单位	mm
项次	零件料号	规格描述	用量	视角	未标注公差: .x ± 0.20 .x° ± 2° .x ± 0.15 .x° ± 0.5° .xx ± 0.10	绘图/日期	审核/日期
						付佳浩	2019.05.18

A

B

C

D