

NOTES:

1.0 PLATING:

1)Contact plating:brass Au3u"over 50-120u" Ni

2.0 Rated voltage(Per Contact):5 Volts

3.0 Rated Current(Per Contact):1A

4.0 Insulation Resistance: 100MΩ minmun

5.0 Dielectric Withstanding Voltage:100V at 60HZ

6.0 Contact Resistance:30mΩ maximun before test and
60mΩ maximum after test at pogo pin working stroke




7.0 Recommended Working Stroke&Force:

1)Stroke 0.7mm(Per Contact): 60gf±20gf


8.0 Mechanical life:

1)Mechanical life :10,000 Cycles Min

9.0 Working Temperature Range: -30~85°

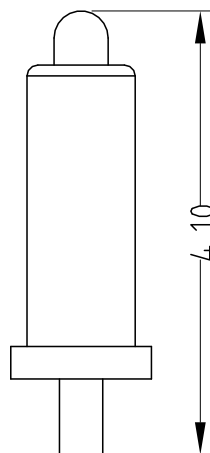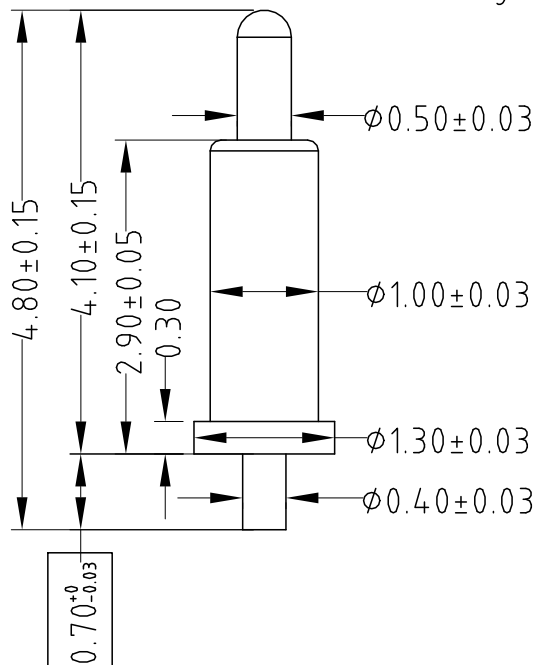

工作高度

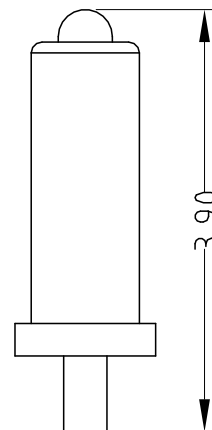

最大压缩高度

模架号

模芯号

POMAGTOR
磁性连接—专业为您定制

深圳市泰科汉泽精密电子有限公司
Pomagtor Precision Electronics

变更说明	序号	变更描述	原因	设计者	日期	描述	1.3-4.8POGO PIN,C3604.AU3U"		版本	A2	
	1	增加重点管控尺寸	A2	邹巧云	2017.11.16	料号	HY90-00858-001	单位	MM	比例	1:1
	2	-----	-----	-----	-----	-----	未标准尺寸公差:±0.15	绘图/日期	邹巧云	2017.11.16	
3	-----	-----	-----	-----	-----	未标注角度公差:±1°	审核/日期				

