



REV	ECN NO.	DETAILS	BY	DATE
1				
2				
3				

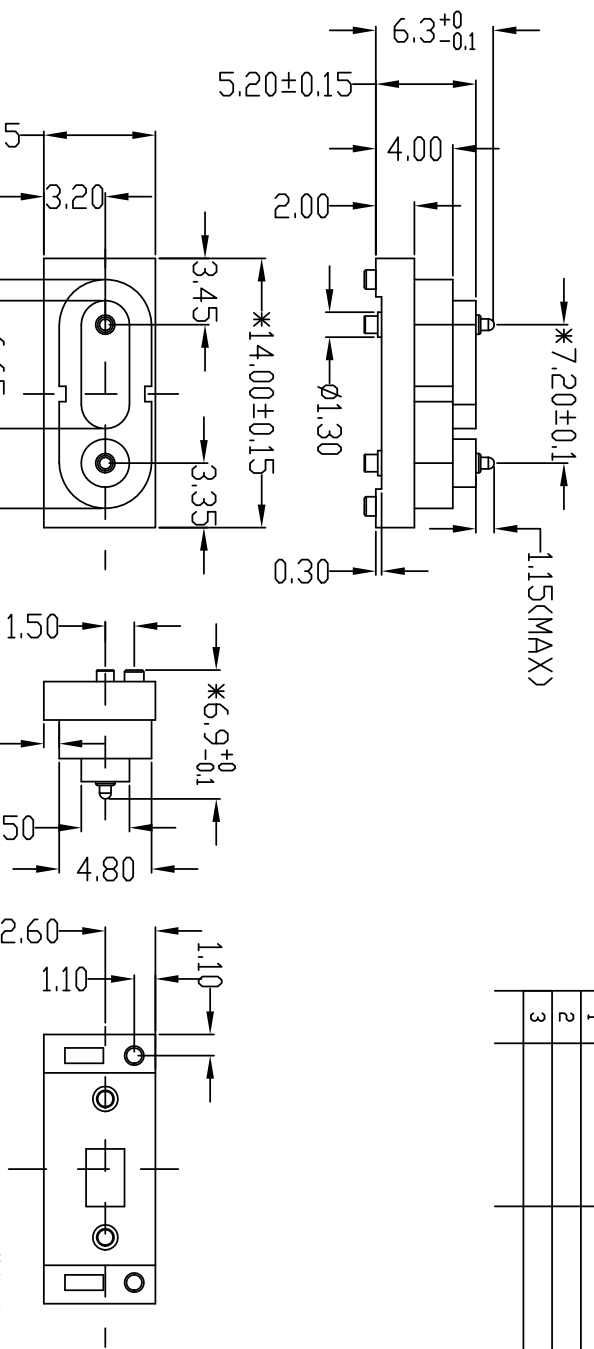

支架模具HZ-00303

技术要求:

- 1.0 材料:
 - 1) 针头: C3604 Ausiur "最小 50-120μ" 镍
 - 2) 针管: C3604 Ausiur "最小 50-120μ" 镍
 - 3) 弹簧: SUS304
 - 4) 塑胶: PA66 深灰色
- 2.0 额定电压(每个触点): 5V
- 3.0 额定电流(每个触点): 1A (最大)
- 4.0 绝缘电阻: 100兆欧(最小)
- 5.0 介质耐受电压: 60Hz, 100Vrms
- 6.0 接触电阻: 30mΩ (最大)
- 7.0 工作行程和弹力:
 - 1) 行程0.5mm(每个触点): 80±15gf
 - 8.0 机械寿命: 10000次(最少)
 - 9.0 工作温度范围: -30~85° C
 - 10.0 重点管控尺寸用 "*" 号表示.

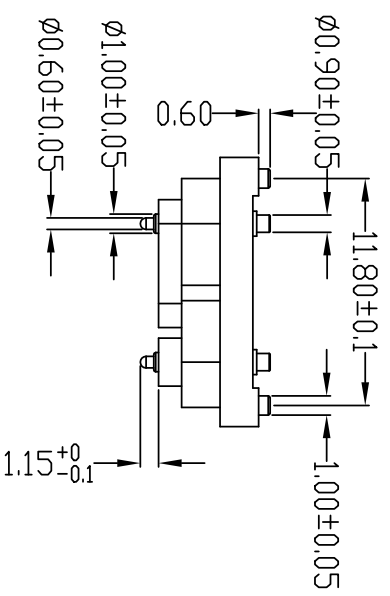

*UNLESS OTHERWISE STATED
ALL DIMENSIONS ARE IN
MILLIMETRES
LINEAR TOLERANCE:
X:±0.20, Y:±0.15, Z:±0.10
X*:±2°, Y*:±0.5°**
Pomagtor
Website:www.pomagtor.net

POMAGTOR
16 YEARS OF PROFESSIONAL
Magnetic connection-professional for customization

TITLE	REV	SCALE	REV	A0	DRAWN BY	CHECKED BY	APPROVED BY
POGOPIN连接器		1			张强		
SPEC	YL5-2P PH7.2 颜色: 灰色	UNIT	mm	DATE	21/05/12	SHEET	1 of 1
PART NO	HY911.PM02030720-01						

序号	料号	名称	描述	用量	PCS	PCS
1	HY921.0013069005-01	弹针	1.3*6, 9弹针 C3604 针头50μ针管3u 工作行程0.5mm 弹力80gf 盐雾48H	2	PCS	PCS
2	HY80.00560-001	支架	YL5 2PIN 公座胶芯 PA66本色配深灰色色粉编号:35188	1	PCS	PCS