


客户图

国内最专业的磁铁连接器制造商-泰科汉泽只造精品

Autodesk教育版产品制作

序号	DESCRIPTION	REV	DESIGN	DATE
①	结构变更	A1	Edition	2014.07.11
②				

- NOTES:
- 1.0 PLATING:
- 1)Contact plating:brass Au5u"over 50-120u" Ni
 - 2)Contact solder area plating: brassAu3u" over 50-120u" Ni
 - 3)Spring: SUS
 - 4)Housing: PA46
- 2.0 Rated voltage(Per Contact): 12 Volts
 - 3.0 Rated Current(Per Contact): 1.2A maximum
 - 4.0 Insulation Resistance: 100MEGAOHMS Minimum
 - 5.0 Dielectric Withstanding Voltage: 100VRMS At 60HZ
 - 6.0 Contact Resistance: 30m Ω E maximum before test and 60m Ω E maximum after test at pogo pin working stroke
 - 7.0 Recommended Working Stroke&Force:
 - 1)Stroke 1.5mm(Per Contact):150gfMax
 - 2)Mechanical life:
 - 8.0 Mechanical life:30,000 Cycles Min
 - 9.0 Working Temperature Range: -30~85°

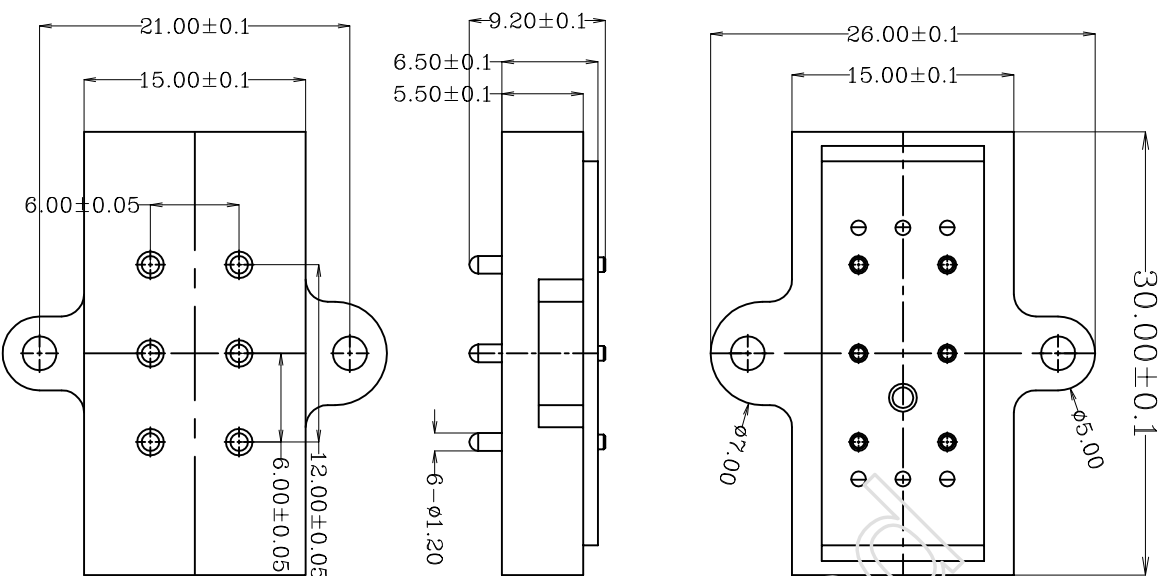

Spring Probe
Tyco Precision

深圳市泰科汉泽精密电子有限公司
Tyco Hancom Precision Electronics

产品名称	ZM6PIN公座成品	产品规格	2.2*9.2(PH6.0)	版本	A1
产品编号	HY91-00134-001	使用材料	(见附表)	比例	1:1
图面编号		表面处理	AU5U'	单位	mm
		未注尺寸公差:	±0.05	繪圖/日期	Edition
		未注角度公差:	±1°	審核/日期	2014-05-14

